


Bulk Feed Tanks

Bulk Feed Tanks



Features:

- ✓ Feed will not separate.
- ✓ No wasted capacity - Tank fills completely.
- ✓ 53 Degree Side draw cone for even flow and no shovel clean-out.
- ✓ Quality powder coated exterior available in several different colours.
- ✓ Moisture proof - Continuous welded seams lock moisture out.
- ✓ Smooth wall construction allows for easy **total clean-out**.
- ✓ Safety-Solid welded ladder for safer access to top lid.

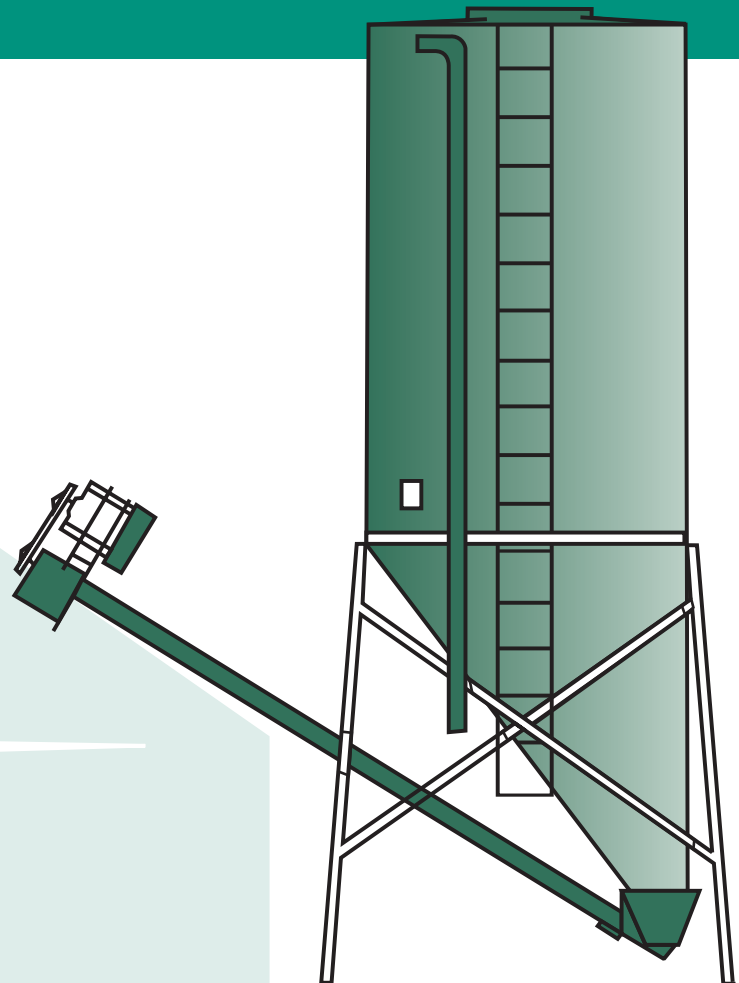

Specifications

SIZE	TONNES at 35LB./CU.FT.	TONNES at 40LB./CU.FT.	CAPACITY IN CU.FT.	CAPACITY IN BUSHELS	WEIGHT BIN IN LBS.
7' x 12'	2.7	3.8	186	151	1150
7' x 14'	4	4.7	263	213	1240
7' x 18'	6.4	7.5	417	338	1540
7' x 22'	9	10.3	571	463	1840
7' x 26'	11.8	13	725	588	2140
7' x 30'	14.5	15.9	879	712	2600
7' x 34'	16	18.4	1013	821	2975
9' x 25'	15.5	17.7	975	790	2900
9' x 29'	20	22.3	1229	995	3300

- The recommended cement base for all 7' diameter bins is 9 1/2' x 9 1/2' x 8-10" thick
- The recommended cement base for all 9' diameter bins is 12' x 12' x 10-12" thick
- The above cement base recommendations are for most normal soil conditions, however, the company will not assume responsibility upon failure in adverse conditions.

All tanks are fabricated from 14 gauge mild steel with a 53 degree side draw cone, supported on 4 legs to allow 26" of clearance under the hopper outlet. Tanks come complete with an exterior ladder, 4" fill pipe, top vented manhole, inspection glass in cylinder and lifting lugs. Quality powder coated exterior available in several different colours.

Options

- Flex adaptor ring
- 4" auger boot with shut off slide
- 4" auger boot (no slide)
- 4" sock and clamps
- Transition with slide for filling pails
- Top cyclone
- 60° centre draw cone
- Poke hole in cone
- 6" auger boot with shut off slide
- 6" auger boot (no slide)
- 6" sock and clamps
- Antidynamic tube
- 8" vent tube, piped to 4" below edge
- 8" vent tube extension
- Cone access panel
- 4" heavy duty auger
- 4" auger head with motor mount and pulley
- Bolt-on safety cage (shipped loose)
- Rack and pinion slide gate
- Interior graphite coating
- Interior powder coating
- Delivery and anchor bolts



Smith Steel & Fabrication Inc.

7319 Hwy 23 N
P.O. Box 152
Atwood, Ontario N0G 1B0

Tel: 519.356.2802
Toll Free: 800.347.2982
Fax: 519.356.2413
Email: info@smithsteel.ca
Website: www.smithsteel.ca

from concept

to completion

Steel Bulk Feed Tanks